Sapphire Stream Technology





SQT61M-GL Cellular Module

The SST SQT61M-GL is a low-cost cellular module that integrates Qualcomm® SDX61 5G Modem-RF system. It supports 5G NR Sub-6 GHz in both SA and NSA modes while maintaining backward compatibility with 4G LTE and 3G networks.

Integrating the 4nm process of the SDX61 chipset, the SQT61M-GL complies with 3GPP Release 16, delivering superior performance and power efficiency. It enables ODMs and OEMs to easily bring high-speed connected devices to the global market. This module is ideal for laptops and personal computers, with a rich set of Windows OS-related and security features. It is also well-suited for FWA CPE, industrial routers, mission-critical IoT applications (ambulance, security, robotics, AR/VR, livestreaming etc.), and remote health-tech (surgery, diagnostic, assistance, etc.) devices.

Applications

PC/Laptop


CPE/Router

Automated Guided Vehicle

Robotics

VR/AR

Features

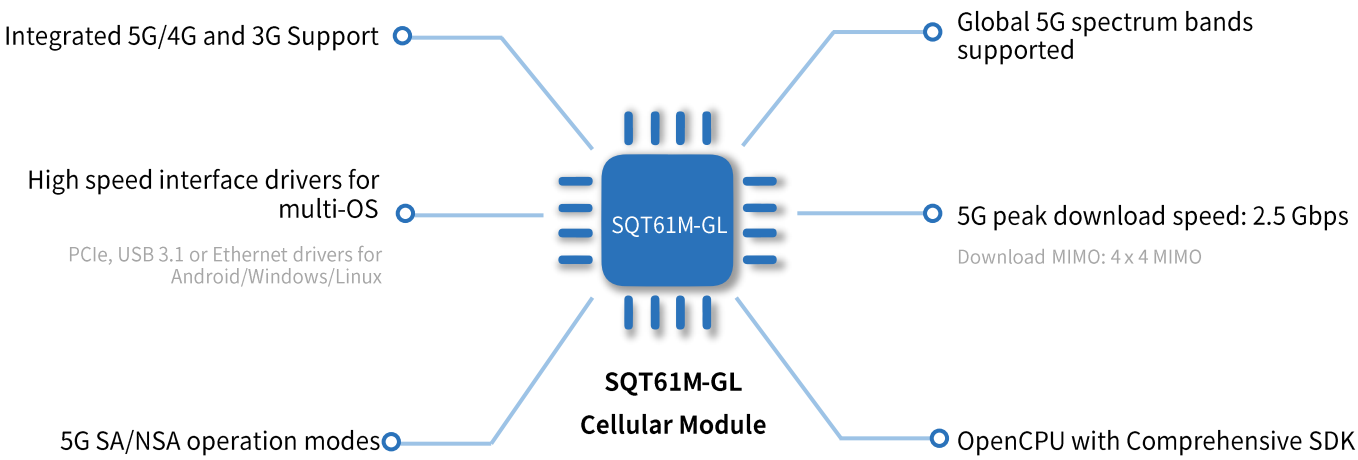

SQT61M-GL Specifications

Category	Item	Description
SDX61 Chipset	CPU	Arm Cortex-A7 up to 1.8 GHz
	DSP	Qualcomm® Hexagon™ DSP processor at up to 1.5 GHz
	Power Management	PMX65
	RF Transceiver	SDR435
Memory	DRAM/NAND [1)]	4Gb LPDDR4 + 4Gb NAND
Air Interface	5G NR	Sub-6G: n1/n2/n3/n5/n7/n8/n12/n13/n14/n18/n20/n25/n26/n28A/n28B/n29/n30/n38/n39/n40/n41/n48/n66/n70/n71/n75/n76/n77/n78/n79
	LTE	B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B21/B25/B26/B28A/B28B/B29/B30/B32/B34/B38/B39/B40/B41/B42/B43/B46/B48/B66/B70/B71/B106
	WCDMA (optional)	B1/B2/B4/B5/B8/B19
	GNSS	GPS/BeiDou/GLONASS/Galileo/QZSS, L1/L5 bands supported
Data Rate (Physical Layer)	Peak Download Speed [4)]	5G NR [2)]: 2.5 Gbps DL 4 x 4 MIMO; LTE: 1 Gbps DL 4 x 4 MIMO; WCDMA (optional): 42 Mbps
	Peak Upload Speed	5G NR [3)]: 900 Mbps UL 2 x 2 MIMO; LTE: 200 Mbps UL 1 x 1 (No MIMO); WCDMA (optional): 5.76 Mbps
Connectivity and Peripheral Interface	Antenna Connector [5)]	4 x sub-6 GHz (GNSS multiplexed)
	UIM	2 x USIM or 1 x USIM + 1 x eSIM (Optional)
	PCIe/USB	1 x Gen3 1-lane + 1 x USB 3.1 SS/USB 2.0 HS 1 x Gen3 2-lane + 1 x USB 2.0 HS (optional)*
Form Factor	M.2 Key B	52.0mm x 30.0mm x 2.15mm
Certification	Regulatory & Carrier	FCC*/IC*/CE*/RCM*/NCC*/JATE*/TELEC*, GCF*/PTCRB*, Windows HLK*, Verizon*/AT&T*/T-Mobile*/DT*/Telstra*/KDDI*/NTT DOCOMO*/Softbank*
Weight	TBD	
Power	Voltage Range	3.135V – 4.4V, typ. 3.3V
Temperature Range	Operating [6)]	-30°C – 75°C
	Extended/Storage [7)]	-40°C – 85°C
Operating System	Linux, can work with Windows/Ubuntu/Android	
3GPP Compliance	5G NR Rel.16 4G LTE Rel.16 UMTS Rel. 9 (optional)	
LTE Category	DL Cat.16 /UL Cat.18	
Dual SIM	DSSA	

* Planning

[1)] Please note that storage devices such as UFS, eMMC, and NAND have a limit to the total amount of data that can be written. Exceeding this limit will cause damage to the storage device.
[2)] Peak Download Speed: 2.5 Gbps TDD duty cycle 95%.
[3)] UL 2x2 MIMO supports bands n41, n77, n78, and n79.
[4)] [5)] For more information, refer to Table 2-20 in the datasheet.
[6)] In the operating temperature range, the module complies with 3GPP specifications when equipped with effective thermal dissipation solutions, such as passive or active heatsinks, heat pipes, or vapor chambers.
[7)] In the extended temperature range, compliance with 3GPP specifications cannot be guaranteed, even with these thermal solutions. However, once the temperature returns to the operating range, the module will regain compliance.

Sapphire Stream Tec
User: None
Email: unknown
Time: 2026-1-10 02:44:20